


Data Sheet

AFDD's

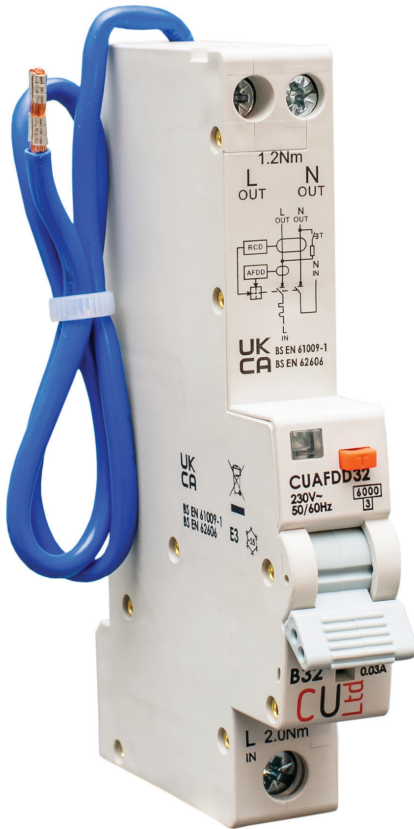

- Combined AFDD and Type A RCBO
- Protects against series and parallel arc faults
- B Curve overload protection
- Conforms to BS EN 62606 and BS EN 61009-1
- Available from 6A-40A

RATING	PART No.
6 Amp	CUAFDD6
10 Amp	CUAFDD10
16 Amp	CUAFDD16
20 Amp	CUAFDD20
32 Amp	CUAFDD32
40 Amp	CUAFDD40

TECHNICAL SPECIFICATIONS

Standard	BS EN 62606 and BS EN 61009-1
Short Circuit Breaking Capacity	6kA
Rated Voltage	240V AC
Operating Characteristic	B Curve
RCD Type	Type A
Rated Residual Operating Current	30 mA
Rated Frequency	50/60Hz
IP Rating	IP20
Installation Method	35mm Din Rail
Terminal Capacity	1-25mm ²
Terminal Torque	Top: 1.2nm Bottom: 2.0nm
Number of Poles	1 Pole & Neutral
Width	18mm